


MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	TURNS PER 90°	WEIGHT [LBS]	MAX. ROUND BORE [IN]	STANDARD VALVE MOUNTING STRADDLE C/L [IN.]	PREFERRED ACTUATOR MOUNTING STRADDLE C/L [IN.]	STANDARD HAND WHEEL DIAMETER [IN.]
24,644	1,711	41:1	14.4	10.25	66	Ø2.55 W/ .70 X.43 KEY	FA16	FA16	20.00



UNITS: INCH [MM]

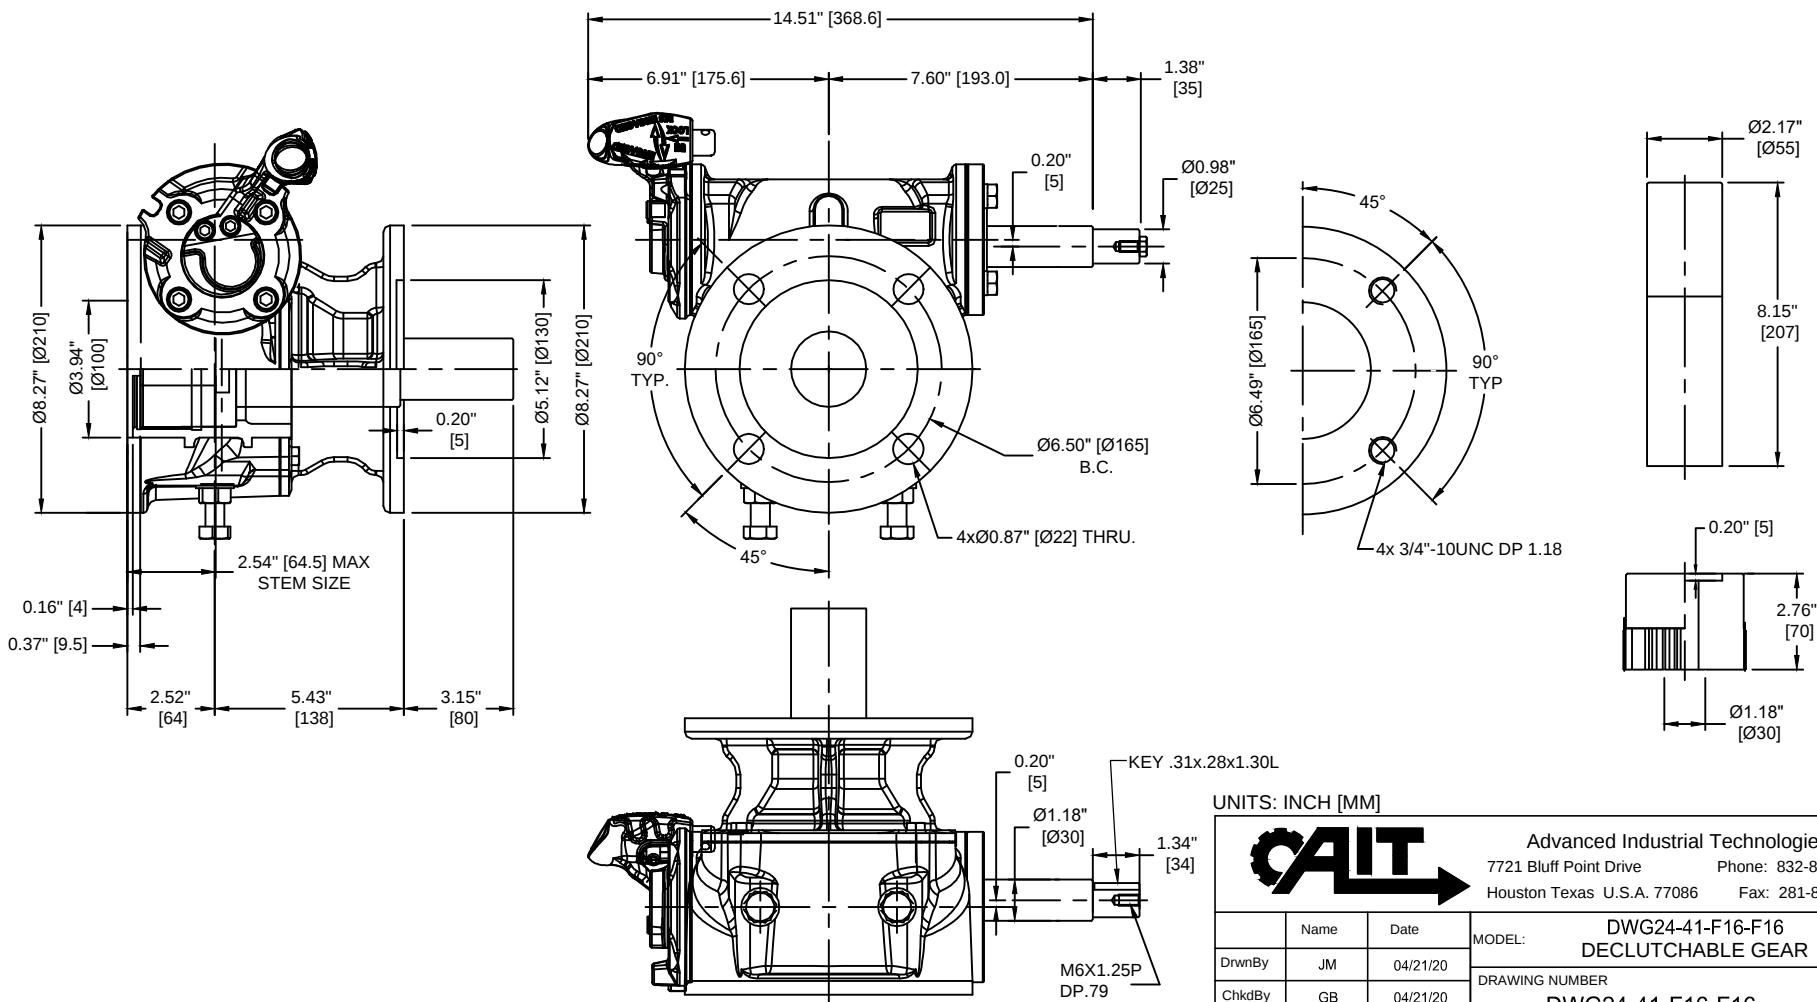

Advanced Industrial Technologies
7721 Bluff Point Drive Phone: 832-855-3033
Houston Texas U.S.A. 77086 Fax: 281-880-8061

Name	Date	MODEL:	DWG24-41-F16-F16 DECLUTCHABLE GEAR
DrwnBy	JM	04/21/20	
ChkdBy	GB	04/21/20	
ApvdBy	JN	04/21/20	
DO NOT SCALE DRAWING		SHEET 1 OF 1	DWG. SIZE : A3

TM-WZDCM