

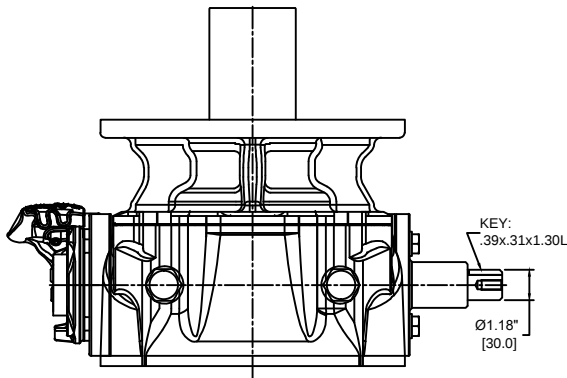


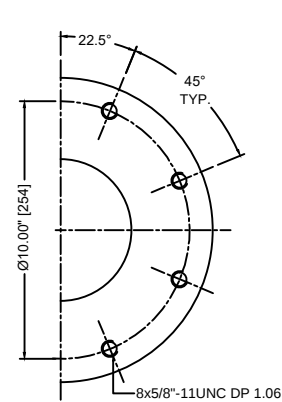


MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	TURNS PER 90°	WEIGHT [LBS]	MAX. ROUND BORE [IN]	STANDARD VALVE MOUNTING STRADDLE C/L [IN.]	PREFERRED ACTUATOR MOUNTING STRADDLE C/L [IN.]	STANDARD HAND WHEEL DIAMETER [IN.]
71,000	3765	54:1	18.9	13.5	174	Ø3.74 W/ .98 X .55 KEY	FA25	FA25	25.00

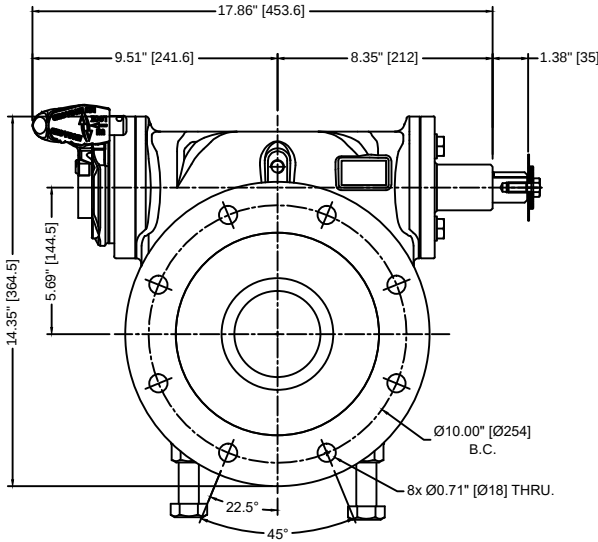

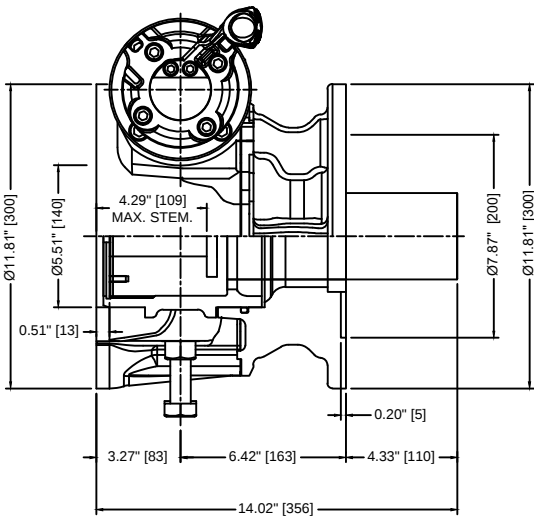

Advanced Industrial Technologies
7721 Bluff Point Drive
Houston Texas U.S.A. 77086

Phone: 281-855-3033
Fax: 281-880-8061

DrwnBy	JM	Date	06/04/20	MODEL:	DWG71-54-F25-F25
ChkdBy	GB	Date	06/04/20	DRAWING NUMBER	DECLUTCHABLE GEAR
ApvdBy	JN	Date	06/04/20	DWG71-54-FA25-FA25-25NN-##	REV. 0
DO NOT SCALE DRAWING				SHEET 1 OF 1 DWG. SIZE: A3	

TW W4DCM